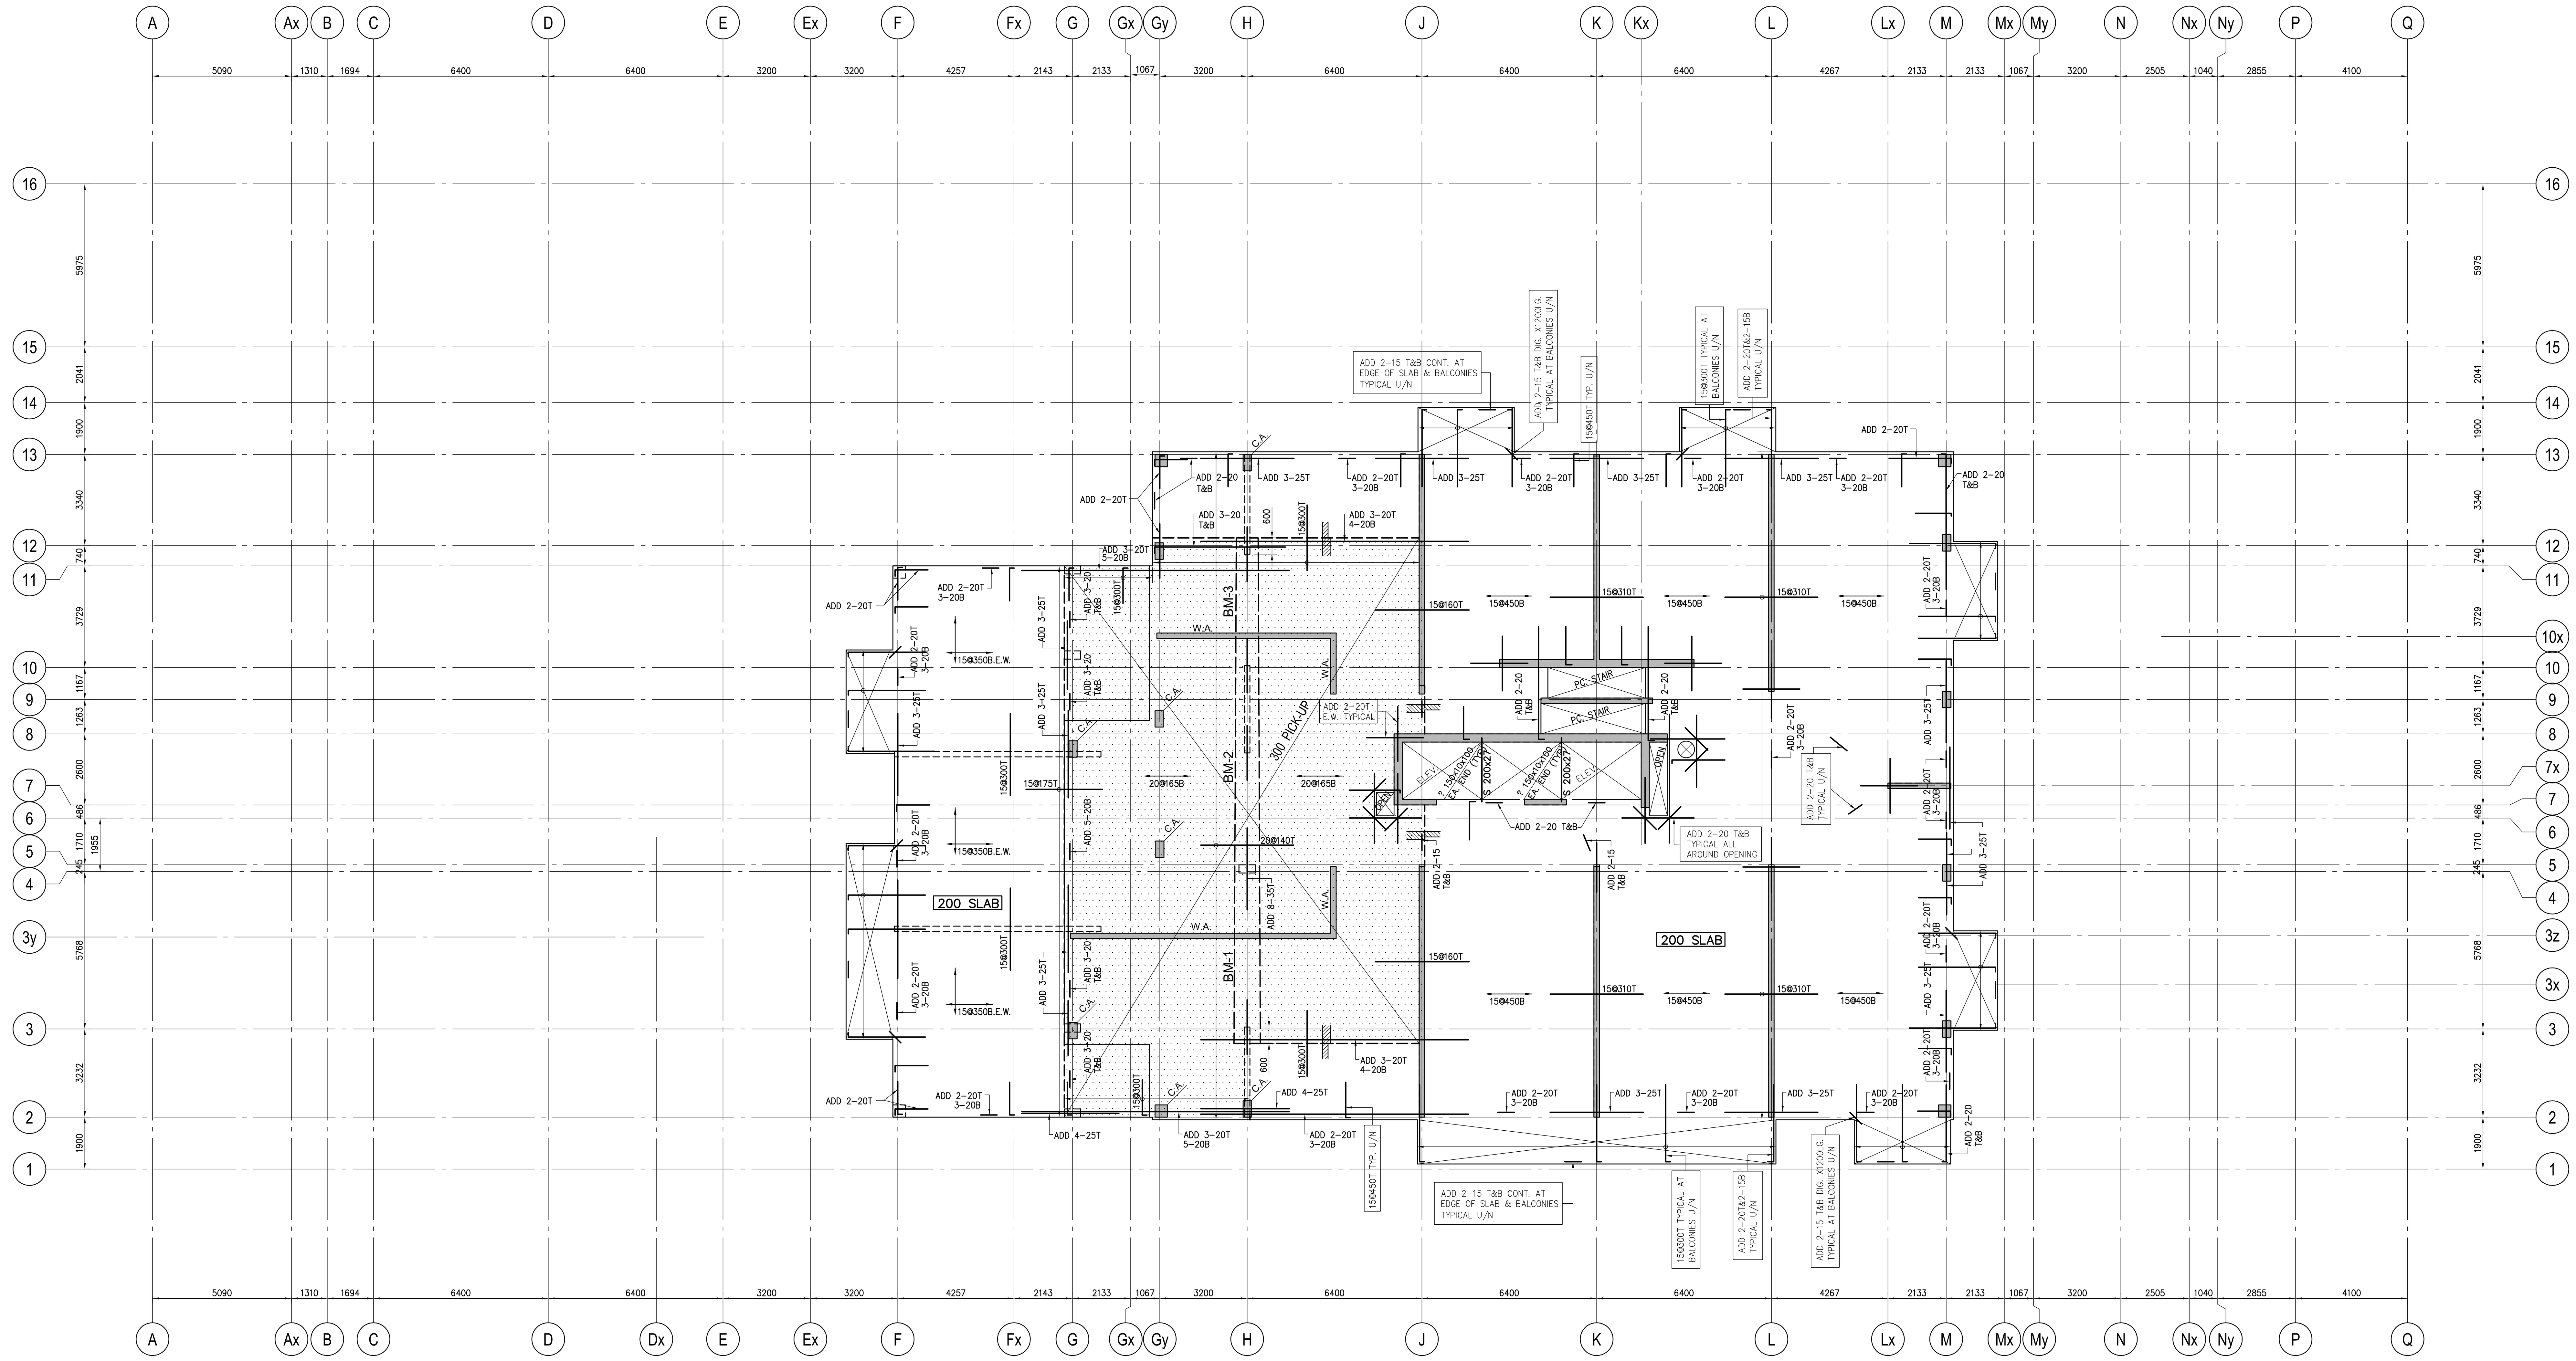

12TH FLOOR FRAMING PLAN

SCALE 1 : 100

1. TOP OF SLAB IS AT ELEVATION AS SHOWN ON ARCH. DRAWINGS EXCEPT AS CROSSED AND NOTED ON PLAN.
2. CONCRETE STRENGTH AT 28 DAYS SHALL BE:
   FOR WALLS AND COLUMNS .... SEE SCHEDULE
   FOR EXT. SLABS .... 35 MPa
   FOR INTERIOR SLABS .... 25 MPa
   FOR BEAMS .... 35 MPa

   CONCRETE EXPOSED TO ELEMENTS SHALL BE 35 MPa WITH 6% TO 8% ENTRAINED AIR.
3. FLOOR SLABS ARE DESIGNED FOR FOLLOWING LOADING CONDITIONS :

	S.I.D.	L.L.
STAIRS & BALCONIES	0.50 KPa	4.80 KPa
LOCKERS & STORAGE ✳	1.30 KPa	4.80 KPa
RESIDENTIAL	1.3 KPa	1.9 KPa
TOILETS	1.30 KPa	2.40 KPa
TERRACES	5.0 KPa	4.80 KPa

✳

4. MINIMUM YIELD STRESS FOR REINFORCING STEEL SHALL BE 400 MPa.
5. TEMPERATURE REINFORCING FOR : 200 SLAB IS 10@250, 210 SLAB IS 10@230, 300 SLAB IS 15@?
6. NO OPENINGS LARGER THAN 300mm x 300mm ARE ALLOWED IN SLAB OTHER THAN THOSE SHOWN ON DRAWINGS.
7. SEE TYPICAL DETAILS ON DRAWINGS S-001 TO S-006.
8. SEE GENERAL NOTES ON DRAWING S-001.
9. REFER TO ARCH. DRAWINGS FOR SLOPES OF SLAB.
10. FOR COLUMN & WALL SCHEDULE SEE DRAWINGS S-301 TO S-306.
11. COORDINATE BEAM DEPTH AT DOOR OPENINGS WITH ARCH. DRAWINGS.
12. EXTEND TEMP. REINF. TO END OF BALCONIES/OVERHANGS.
13. TOP BARS TERMINATING AT EDGE OF SLAB TO HAVE 180° HOOK.

DIRECTION OF REINFORCING OF THE SLAB UNLESS DRAWWN ON THE PLAN
TUL & BLL
TLL & BUL

12TH FLOOR BEAM SCHEDULE (fc'=35MPa)

MARK	WIDTH	DEPTH	REINFORCEMENT BOTTOM CONT.	REINFORCEMENT BOTTOM ADDED	REINFORCEMENT TOP CONT.	REINFORCEMENT TOP "A"BARS	STIRRUPS SIZE	STIRRUPS TYPE	STIRRUPS SPACING EACH END	REMARKS
BM-1	800	600	7-35		5-20		15		1@70, 13@145, @275	ADD 1-15HEF
BM-2	800	600	6-25		5-20		15		1@95, 10@185, @275	ADD 1-15HEF
BM-3	800	600	7-35		5-20		15		1@160, @320	ADD 1-15HEF

Jablonsky, Ast and Partners
CONSULTING ENGINEERS
1129 LESLIE STREET
DON MILLS, ON., M3C 2K5
TEL. 416-447 7405
FAX 416-447 2771
E-mail jap@astint.on.ca

P.F. AST 13015 — PROFESSIONAL ENGINEER, PROVINCE OF ONTARIO

FIRST FLOOR ELEV. 93.60m

no.	issued / revised	date:
1	ISSUED FOR PERMIT	2014-05-30
2	RE ISSUED FOR PERMIT	2014-07-10
3	ISSUED FOR FORMING TENDER	2014-08-27
4	CONSTRUCTION REVIEW	2014-12-15
5	RE ISSUED FOR PERMIT	2015-01-27
6	ISSUED FOR CONSTRUCTION	2015-03-06

ALEXANDRA PARK - BLOCK 11

TORONTO, ONTARIO

project no: 13015
scale: 1:100
drawn by: H.W.
reviewed by: HOUMAN
date started: MARCH 2014

12TH FLOOR FRAMING PLAN

S-114