


3RD FLOOR BEAM FRAMING PLAN

SCALE: 1 : 100


- TOP OF SLAB IS AT ELEVATION AS SHOWN ON ARCH. DRAWINGS EXCEPT AS CROSSED AND NOTED ON PLAN.
- CONCRETE STRENGTH AT 28 DAYS SHALL BE:
 - FOR WALLS AND COLUMNS SET SCHEDULE
 - FOR EXT. SLABS SET SCHEDULE
 - FOR INTERIOR SLABS 25 MPa
 - FOR BEAMS AND FLOOR OF SLAB 25 MPa
 CONCRETE EXPOSED TO ELEMENTS SHALL BE 25 MPa WITH 6% TO BE ENHANCED ARE
- FLOOR SLABS ARE DESIGNED FOR FOLLOWING LOADING CONDITIONS:

STAIRS & BALCONIES	S.L.D.	LL
LOOKERS & STORAGE	0.50 KPa	4.80 KPa
RESIDENTIAL	1.30 KPa	4.80 KPa
TOILETS	1.30 KPa	1.9 KPa
TERRACES	5.0 KPa	4.80 KPa

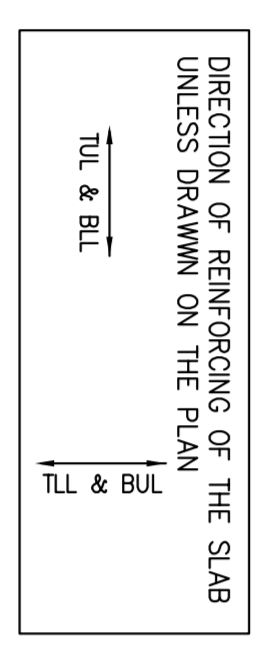


3RD FLOOR BEAM SCHEDULE (fc' = 35MPa)

MARK	WIDTH	DEPTH	REINFORCEMENT		STIRRUPS		REMARKS
			BOTTOM CONT. #	TOP CONT. #	SIZE	SPACING EACH END	
BM-1	600	600	4-20	2-20	10	198200, Ø400	ADD 1-15HEF
BM-2	600	600	7-25	4-20	10	198200, Ø400	ADD 1-15HEF
BM-3	800	600	9-25	6-20	10	1985, 99170, Ø250	ADD 1-15HEF
BM-4	800	600	9-25	5-20	10	1985, 99170, Ø250	ADD 1-15HEF
BM-5	800	600	9-25	5-20	10	1985, 148165, Ø300	ADD 1-15HEF
BM-6	800	600	9-25	5-20	10	1985, 58230, Ø300	ADD 1-15HEF
BM-7	800	600	6-20	2-20	10	198200, Ø400	ADD 1-15HEF
BM-8	800	600	6-20	6-20	10	19850, Ø300	ADD 1-15HEF
BM-9	800	600	6-25	6-20	10	1970, 148140, Ø240	ADD 1-15HEF

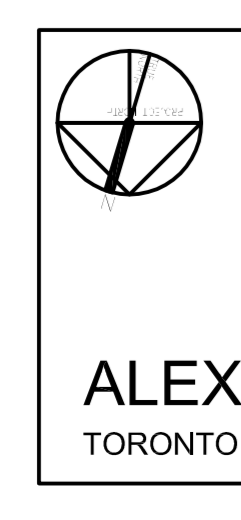

ALEXANDRA PARK - BLOCK 11
TORONTO, ONTARIO

Joblonsky, Asst
and Partners
ENGINEERS
200 BAYVIEW AVE. SUITE 200
SCARBOROUGH, ONTARIO M1S 5B5
Tel: 416-441-2727
Fax: 416-441-2727
E-mail: joblonsky@jpa.ca

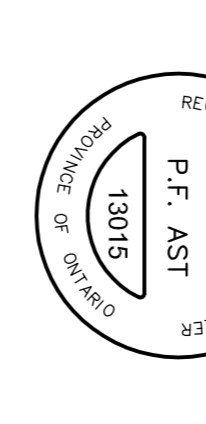

FIRST FLOOR ELEV. 80.00m

No.	Revised/Issued	Date
1	Issued for Construction	2014/04/04
2	Revised for Construction	2014/04/04
3	Revised for Construction	2014/04/04
4	Revised for Construction	2014/04/04
5	Revised for Construction	2014/04/04
6	Revised for Construction	2014/04/04
7	Revised for Construction	2014/04/04
8	Revised for Construction	2014/04/04
9	Revised for Construction	2014/04/04
10	Revised for Construction	2014/04/04
11	Revised for Construction	2014/04/04
12	Revised for Construction	2014/04/04
13	Revised for Construction	2014/04/04
14	Revised for Construction	2014/04/04
15	Revised for Construction	2014/04/04
16	Revised for Construction	2014/04/04